



## Long Road Racing

2668 Peachtree Road ▪ Statesville, NC 28625 ▪ Phone: 980-223-8547

Since 2001

LongRoadRacing.com

# Global MX-5 Cup Car Technical Service Bulletin #7-20-16

## GEMS ECU Cover installation

### Purpose for this TSB:


1. Install a cover for the GEMS ECU

### Installation:

1. Follow all safety standards and wear the appropriate safety gear
2. Ensure that the kill switch is OFF, and the car has cooled down completely
3. Locate the GEMS ECU and disconnect the two connectors (there is a small tab that presses in so that the connector lock can be released). Gently move the ECU connectors to give you room to install the cover.



4. Remove the two lower ECU bracket bolts from the drivers side frame rail

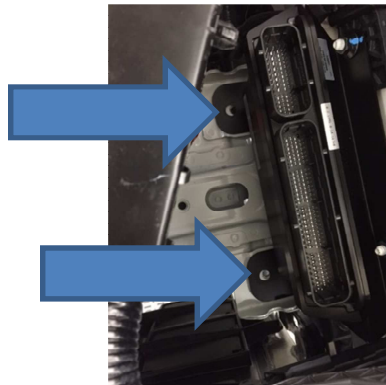


5. Install the lower cover (larger of the two parts supplied) and reinstall the two lower ECU bolts.



Top edge of installed cover

6. Reconnect ECU connectors and clip the large black box onto the side of the lower ECU cover

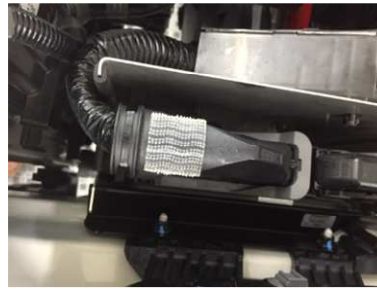

7. Place Velcro onto the top of the front connector as shown above
8. Install top ECU cover with supplied thumb screw



If you have any questions about this Technical Bulletin, please contact Glenn Long at:  
[GLENN@LongRoadRacing.COM](mailto:GLENN@LongRoadRacing.COM) or 919-614-4797